




FD9187-HT-A

Fixed Dome Network Camera

5MP 30fps • 2MP 60fps • Smart Stream III • SNV • WDR Pro • 50M IR • Smart IR II • Smart VCA

- 30 fps @ 2560x1920, 60 fps @ 1920x1080
- H.265 Compression Technology
- Smart Stream III to Optimize Bandwidth Efficiency
- SNV (Supreme Night Visibility) for Low Light Conditions
- WDR Pro for Unparalleled Visibility in Extremely Bright and Dark Environments
- Built-in IR Illuminators, Effective up to 50 Meters
- Smart IR II Technology to Avoid Overexposure
- Smart Motion Detection to Reduce False Alarms
- Smart VCA (Intrusion Detection, Loitering Detection, Line Crossing Detection)
- Trend Micro IoT Security
- Built-in PIR Sensor for Human Detection



Technical Specifications

System Information

| | |
|-------|---------------------------------|
| Model | FD9187-HT-A |
| CPU | Multimedia SoC (System-on-Chip) |
| Flash | 256 MB |
| RAM | 1 GB |

Camera Features

| | |
|-------------------------------|---|
| Image Sensor | 1/2.7" Progressive CMOS |
| Max. Resolution | 2560x1920 (5MP) |
| Lens Type | Motorized, Vari-focal, Remote Focus |
| Focal Length | f = 2.7 ~ 13.5 mm |
| Aperture | F1.4 ~ F2.8 |
| Auto-iris | P-iris |
| Field of View | 100° ~ 30° (Horizontal) 72° ~ 23° (Vertical) 135° ~ 38° (Diagonal) |
| Shutter Time | 1/5 sec. to 1/32,000 sec. |
| WDR Technology | WDR Pro |
| Day/Night | Yes |
| Removable IR-cut Filter | Yes |
| IR Illuminators | Built-in IR illuminators, effective up to 50 meters with Smart IR II, IR LED*4 |
| Minimum Illumination | 0.075 lux @ F1.4 (Color) <0.01 lux @ F1.4 (B/W) 0 lux with IR illumination on |
| Pan Range | 350° |
| Tilt Range | 80° |
| Rotation Range | ±175° |
| Pan/Tilt/Zoom Functionalities | ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in) |
| Storage | Seamless Recording to MicroSD/SDHC/SDXC card slot and recording to network-attached storage (NAS) |
| Built-in Installation Aids | Remote focus, remote zoom, CVBS |

Video

| | |
|--------------------|--|
| Video Compression | H.265, H.264, MJPEG |
| Maximum Frame Rate | 30 fps @ 2560x1920 (WDR Pro on) 30 fps @ 2560x1440 (WDR Pro on) 60 fps @ 1920x1080 (WDR Pro off) |
| Maximum Streams | 3 simultaneous streams |
| S/N Ratio | 57 dB |
| Dynamic Range | 120 dB |
| Video Streaming | Adjustable resolution, quality and bit rate control, Smart Stream III |
| Image Settings | General settings: video title and time stamp overlay, video orientation (flip, mirror, rotation), day/night settings; Illuminators: illuminators, anti-overexposure; Image settings: white balance, image adjustment (brightness, contrast, saturation, sharpness, gamma curve), defog, 3DNR; Exposure: BLC, HLC, exposure control (exposure level, iris adjustment, exposure time, gain control, iris mode), AE speed adjustment, WDR; Focus: zoom, focus; Privacy mask; Scheduled profile settings |

Audio


| | |
|-------------------|--|
| Audio Capability | Two-way Audio (full duplex) |
| Audio Compression | G.711, G.726 |
| Audio Interface | Built-in microphone External microphone input External line output |
| Effective Range | 5 meters |

Network

| | |
|-------|-----------------------------------|
| Users | Live viewing for up to 10 clients |
|-------|-----------------------------------|

| | |
|-----------------------------|---|
| Security | Access list, digest authentication, HTTPS, IEEE 802.1x, password protection, Trend Micro IoT Security (brute force attack event, cyberattack event, quarantine event), user access log, user account management |
| Protocols | 802.1X, ARP, Bonjour, CIFS/SMB, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, NTP, PPPoE, QoS (CoS/DSCP), RTSP/RTP/RTCP, SMTP, SNMP, SSL, TCP/IP, TLS 1.2, UDP, UPnP |
| Interface | 10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard. |
| ONVIF | Profile G, S supported, specification available at www.onvif.org |
| Solution Integration | |
| Smart Motion Detection | Five-window video motion detection, people detection, time filter |
| Smart VCA | Intrusion detection, loitering detection, line crossing detection, unattended object detection, missing object detection, face detection, crowd detection, running detection *Please access https://license.vivotek.com/ to get the free trial license. |
| VADP Package | Deep Learning VCA (Smart Motion Detection, Smart VCA), Stratocast, Trend Micro IoT Security (3-year free trial) |
| Alarm and Event | |
| Event Trigger | Audio detection, camera tampering detection, cybersecurity events (brute force attack event, cyberattack event, quarantine event), digital input, manual trigger, motion detection, periodical trigger, PIR detection, recording notification, SD card life expectancy, shock detection, system boot |
| Event Action | Event notification via audio clip, digital output, email, HTTP, FTP, NAS server, SD card File upload via email, HTTP, FTP, NAS server, SD card |
| General | |
| Connectors | RJ-45 cable connector for 10/100Mbps Network/PoE connection Audio input Audio output AC 24V power input (Optional) DC 12V power input Digital input *2 Digital output *2 TV out |
| LED Indicator | System power and status indicator |
| Power Input | IEEE 802.3af Class 0 PoE, DC 12V, AC 24V (Optional) (Simultaneous Power Redundancy Supported) |
| Power Consumption | PoE: Max. 12 W DC 12V: Max. 9 W AC 24V (Optional): Max. 10.5 W |
| Dimensions | Ø 139 x 103 mm |
| Weight | 538 g |
| Certifications | EMC: CE (EN 55032 Class B, EN 55024), FCC (FCC Part 15 Subpart B Class B), RCM (AS/NZS CISPR 32 Class B), VCCI (VCCI-CISPR 32 Class B); Safety: UL (UL 62368-1), CB (IEC/EN 62368-1, IEC/EN 62471); IA: BIS (IS 13252) |
| Operating Temperature | Starting Temperature: 0°C ~ 45°C (32°F ~ 113°F) Working Temperature: -10°C ~ 45°C (14°F ~ 113°F) (IR off) -10°C ~ 40°C (14°F ~ 104°F) (IR on) |
| Humidity | 90% |
| Warranty | 36 months |
| System Requirements | |
| Operating System | Microsoft Windows 10/8/7 Mac 10.12 (Chrome only) |
| Web Browser | Chrome 58.0 or above Internet Explorer 11 |
| Other Players | VLC: 1.1.11 or above |
| Included Accessories | |
| Packing Contents | Quick installation guide, alignment sticker, screw pack |

Dimensions

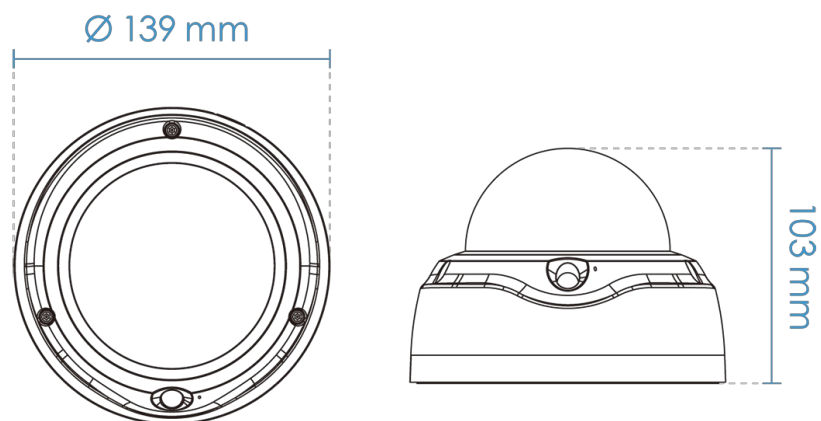

Compatible Accessories

Mounting Kits



AM-105
Recessed Kit

Mounting Kits



AM-21A
L-shape Bracket

Mounting Kits



AM-514
Adapting Plate

Mounting Kits



AM-527
Mounting Adapter